



### SUMMIT SERIES - ROOF GUIDE

**EAVE LENGTHS:**  
 FRONT = 24"  
 SIDE = 16"  
 BACK = 16"

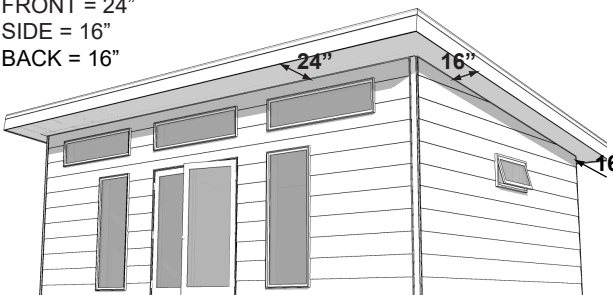


**STANDARD LENGTH EAVES**  
 BEST FOR PLACEMENT AWAY FROM SETBACKS

**EAVE LENGTHS:**  
 FRONT = 24"  
 SIDE = 16"  
 BACK = 6"

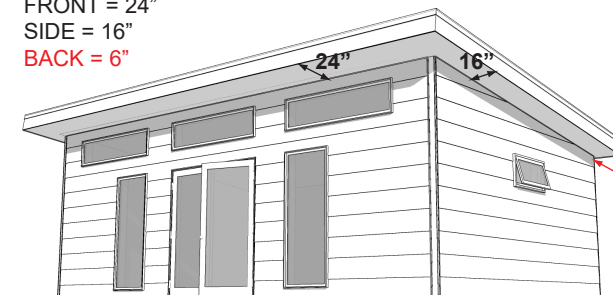

**SHORTENED BACK EAVES**  
 RECOMMENDED IF NEAR REAR SET-BACK

**EAVE LENGTHS:**  
 FRONT = 24"  
 SIDE = 6"  
 BACK = 6"

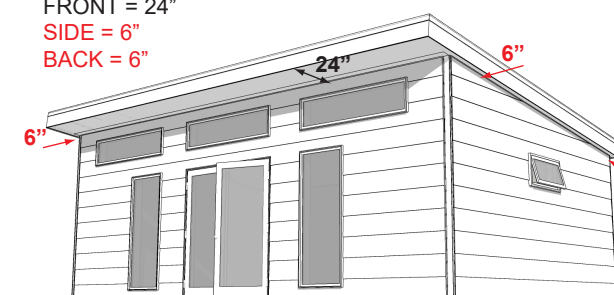

**SHORTENED BACK AND SIDE EAVES**  
 RECOMMENDED IF NEAR REAR & SIDE SET-BACKS

SUMMIT SERIES - SPECIFICATIONS								
MODEL	308	440	476	608	680	800	1000	Notes
DEPTH	14	20	14	16	20	20	20	
WIDTH	22	22	34	38	34	40	50	
OVERALL HT	10'-10"	11'-3"	10'-10"	10'-10"	11'-3"	11'-3"	11'-3"	Does not include Foundation*
FRONT WALL HT	9'-9"	10'-0"	9'-9"	9'-9"	10'-0"	10'-0"	10'-0"	*
BACK WALL HT	8'-0 1/2"	7'-6 1/2"	8'-0 1/2"	7'-9 1/2"	7'-6 1/2"	7'-6 1/2"	7'-6 1/2"	*
BUILDING SQ FT	<b>308</b>	<b>440</b>	<b>476</b>	<b>608</b>	<b>680</b>	<b>800</b>	<b>1000</b>	Footprint
FINISHED SQ FT	<b>270</b>	<b>396</b>	<b>425</b>	<b>551</b>	<b>623</b>	<b>736</b>	<b>925</b>	Interior (Rounded to nearest SQ FT)
WEIGHT (~ LBS)	8624	14080	13328	17024	21760	25600	32000	(Approximate, varies by configuration)**
WALL FRAMING	2x6	2x6	2x6	2x6	2x6	2x6	2x6	R21 Batt Insulation (Lifestyle Package)
RAFTERS	9 1/4 LVL	11 1/4 LVL	9 1/4 LVL	9 1/4 LVL	11 1/4 LVL	11 1/4 LVL	11 1/4 LVL	R30 Batt Insulation (Lifestyle Package)
SNOW LOAD	100 psf	40 psf	100 psf	60 psf	40 psf	40 psf	40 psf	UP TO psf shown (max)

\*Dimensions rounded to nearest 1/2"

\*\*Weights are approximate based on shell only and will vary by model configuration